

014640 Portable Two Way Antennas - HA-150H-MT -

仕様

◆Electrical Specifications

Item	Specification
Frequency Range	150MHz
Gain	0 dBi
V.S.W.R(Max.)	Less than 2
Impedance	50 Ω
Polarization	Vertical
Power Input(max.)	5W


◆Mechanical

Item	Specification
Dimensions	162±3mm
Connector Type	Stud-Type
Mount Type	Sleeve Molding Type
Operating Temp	-30° ~ +60° C

製品写真



寸法図

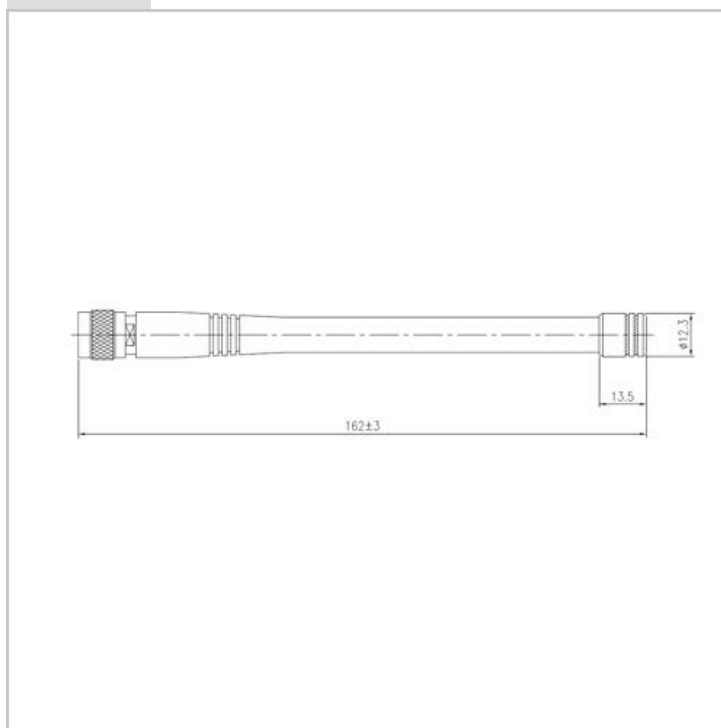

014641

Portable Two Way Antennas - HA-915W-MRSMA -

仕様


◆Electrical Specifications

Item	Specification
Frequency Range	915MHz
Gain	0 dBi
V.S.W.R(Max.)	Less than 2
Impedance	50 Ω
Polarization	Vertical
Power Input(max.)	5W


◆Mechanical

Item	Specification
Dimensions	80±2mm
Connector Type	SMA-Female
Mount Type	Sleeve Molding Type
Operating Temp	-30° ~ +60° C

製品写真

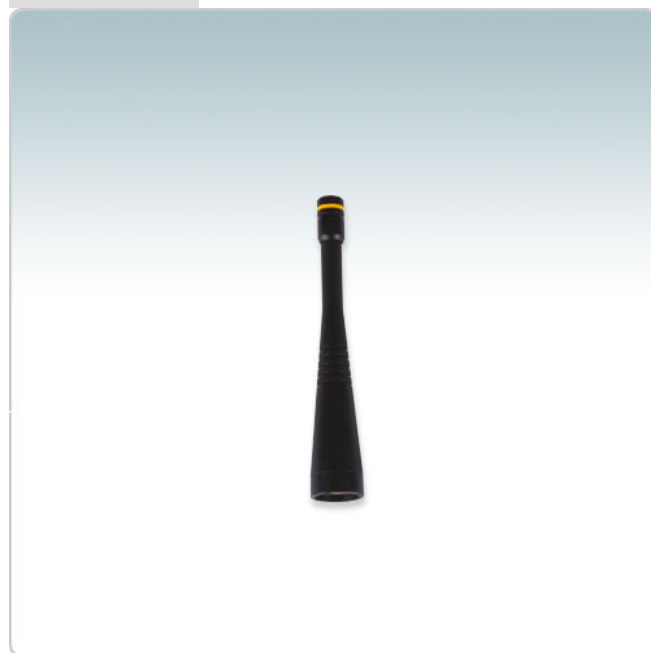

寸法図

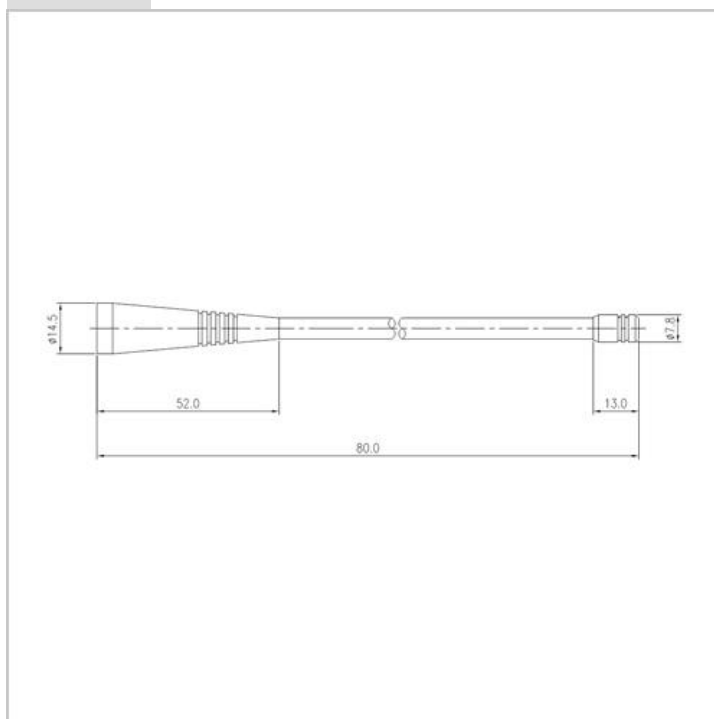

014642

Portable Two Way Antennas - HA-915W-MSC -

仕様


◆Electrical Specifications

Item	Specification
Frequency Range	915MHz
Gain	0 dBi
V.S.W.R(Max.)	Less than 2
Impedance	50 Ω
Polarization	Vertical
Power Input(max.)	5W

◆Mechanical

Item	Specification
Dimensions	88±3mm
Connector Type	RG-316 Cable Type
Mount Type	Sleeve Molding Type
Operating Temp	-30° ~ +60° C

製品写真

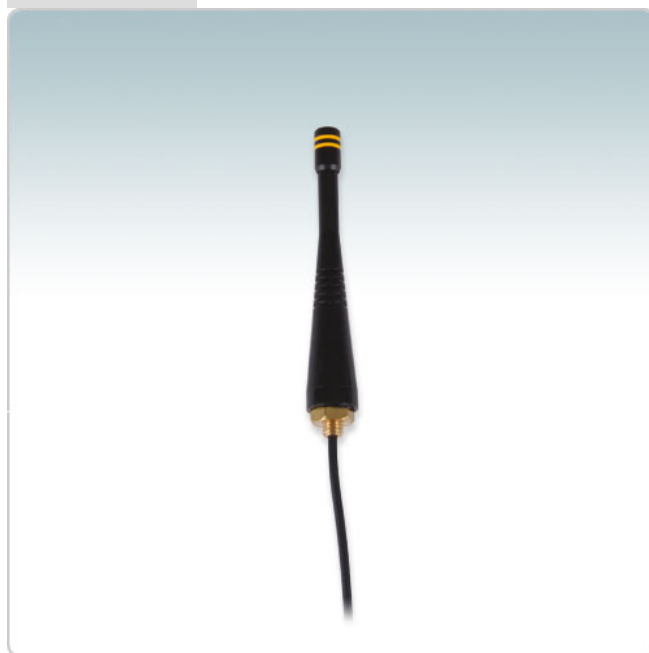

寸法図

