


014615 GPS Antennas - Module Antennas - HAG-400-A-3V -

仕様

◆ HAG-400-A-3V

| Model | HAG-400-A-3V |
|------------------------------------|--|
| ANTENNA ELEMENT | |
| Center Frequency | 1575.42 MHz ±1.023 MHz |
| Polarization | R.H.C.P. |
| Gain @ Zenith | +2dBi typical |
| Axial Ratio | 3dB typical 6dB max |
| Impedance | 50 Ω |
| LOW NOISE AMPLIFIRE | |
| Frequency | 1575.42 MHz ±1.023 MHz |
| VSWR | Less than 2.0 |
| Impedance | 50 Ω |
| LNA Gain | 26dB (± 2dB) |
| Noise Figure | 2.0dB (max) |
| Band Attenuation | 20dB min @Fo ± 50 MHz |
| Axial Ratio | 3dB max |
| Voltage | DC +3V (± 10%) |
| Current | 20mA (max) |
| MECHANICAL | |
| Height | 7.3 mm |
| Width | 22.5 x 22.5 mm |
| Cable | RG-174 5m, 1.5D-2V 5m Other Types(Optional) |
| Connector | SMA Other Types(Optional) |
| ENVIROMENTAL | |
| Operating Temp. | -30℃ ~ +80℃ |
| Storage Temp. | -40℃ ~ +90℃ |
| APPLICATION: Car Navigation | |

製品写真

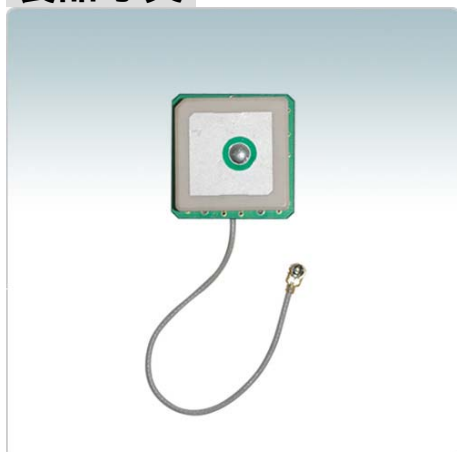

寸法図

